


Santarini Vertical Square Heated Towel Rail

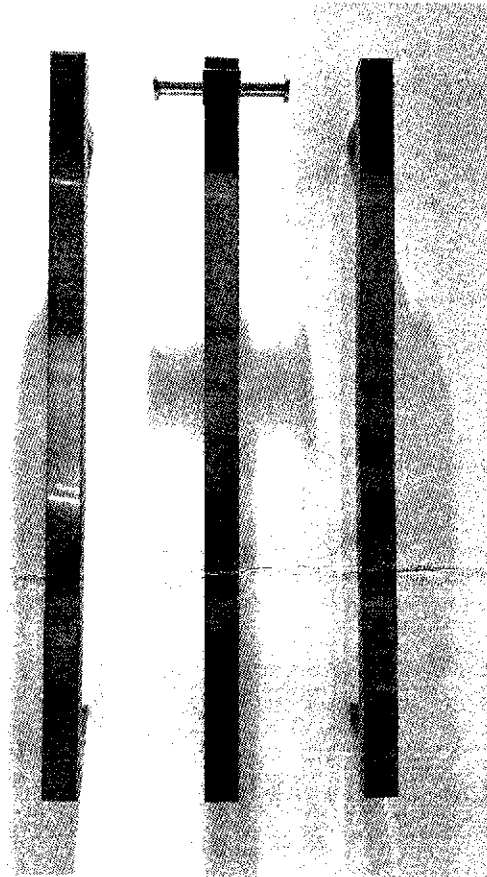

Models Available --With mounting bracket option (to cater for hidden or exposed cord)

BE.VRS900-CH

BE.VRS900-MB

BE.VRS900-GM

BE.VRS900-BN

BE.VRS900-BG

(can be installed horizontally or vertically)

OPERATING INSTRUCTIONS

SAFETY INFORMATION

When using any electrical appliance ,basic safety precautions should always be observed .

READ THESE INSTRUCTIONS CAREFULLY .

Keep them in handy for future reference .

☐ This appliance is intended to warm and dry towels and therefore is hot to the touch .

When used by or near young children or infirm persons ,close supervision is necessary .Young children should be supervised to ensure that they do not play with the appliance .

☐ Any rise in ambient temperature is directly reflected in the appliance,and as a result of this ,the appliance will feel hotter to the touch during warmer periods.Also the insulation effect of towels will cause the operation temperature to increase slightly .

☐ The appliance is to be installed so that switches and other controls cannot be touched by a person in the bath or shower .

☐ DO NOT use this appliance for any purpose other than its intended use .

☐ To avoid a hazard this heated towel rail MUST NOT be used to carry towels or any other articles that have been in contact with oil,petroleum based products or dry cleaning fluids .

☐ Use this appliance only with the voltage specified on the rating label,or elsewhere in these instructions.

☐ Regulations require that electrical work be carried out only by authorized persons .For your own safety and that of others ensure this is done .

☐ DO NOT immerse in any liquid .

☐ For service contact your nearest Authorized Service Agent .

☐ **WARMING :In order to avoid a hazard for young children ,this appliance must be installed so that the bottom rail is at least 600mm above the floor .**

SPECIFICATIONS

DIMENSIONS					
Model	BE.VRS900-CH	BE.VRS900-MB	BE.VRS900-GM	BE.VRS900-BN	BE.VRS900-BG
Height(mm)	900	900	900	900	900
Width (mm)	38	38	38	38	38
Depth (mm)	100	100	100	100	100
ELECTRICAL					
Wattage (W)	20W	24W	20W	20W	20W
Colour	Chrome	Matte Black	Gunmetal	Brushed Nickel	Brushed Gold
Power Supply	230-240 Volts; 50Hz				
International Protection Rating :IP55					


INSTALLATION

Mounting towel rail :

Please note: We advise that the towel rail should be installed by a professional .
Please read the safety information on the previous page carefully before mounting .



For example :

1: First, open the package ,check the towel rail and the mounting accessories.

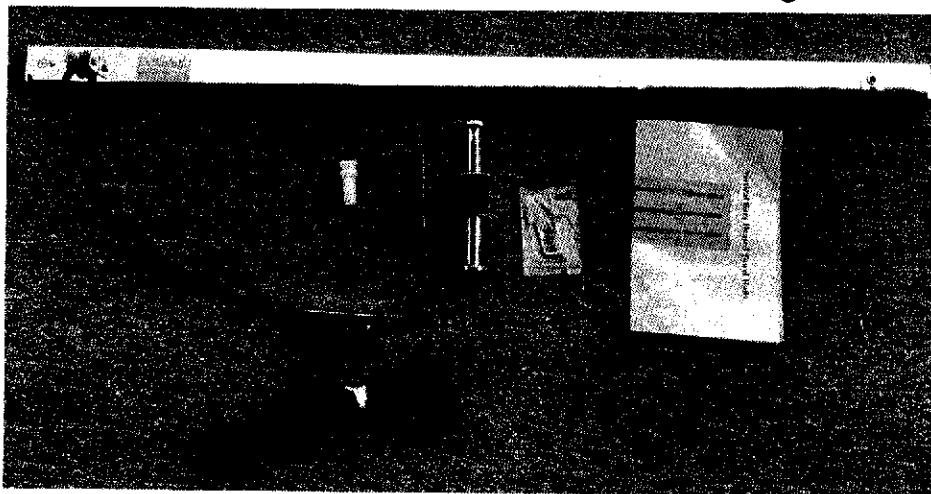

2: Fix the hook to the vertical bar .

Please note that the hook is optional and is not necessary for the unit to operate.
Slide the hook on the top of the vertical bar (ensuring that the small screw hole is facing towards the wall)and hold in desired position.Use the small Allen key to fix it.

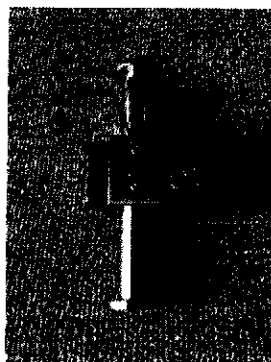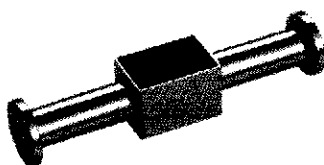

3: Confirm your concealed power wires before you install the fixing base to the wall

4: Mark the centre distance for your model .And it is important that the line between these two points is level .



Model	BE.VRS900-CH	BE.VRS900-MB	BE.VRS900-GM	BE.VRS900-BN	BE.VRS900-BG
Horizontal Distance(mm)	780	780	780	780	780

5: Install two legs and wall brackets (Leg A and Leg B as follow)

Measure and mark out the bracket positions making sure they are level. Drill a 6mm hole for each of the two wall brackets and an extra hole for cable at the wiring point and insert suitable wall plugs. Fix two mounting brackets in place using a Allen key and grub screws.




Leg A




Install hook



Fix leg with screw

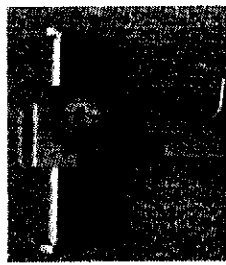

Install mounting bracket

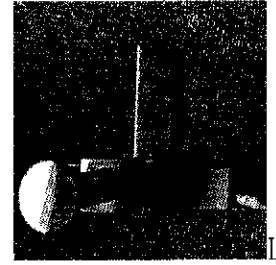


Fix grub screw


6: With mounting bracket option (to cater for hidden or exposed cord)

This box contains a set of 2 legs for your heated towel rail .

A) For a **concealed cord** entry you require the following :

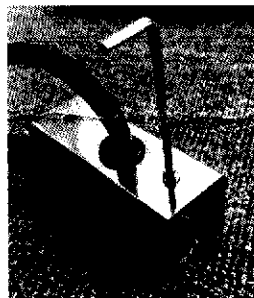

Remove grub screw

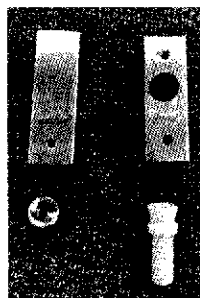

Leg A Leg B



Cut the plug




The wire comes out of sleeve




Typically a concealed cord entry is used for a new home or new bathroom installation where no existing outlet is present .

OR


B) For an **exposed cord** entry you require the following :

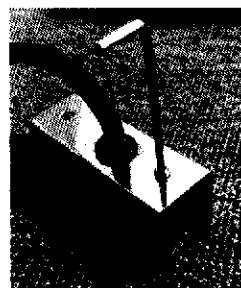

Remove grub screw

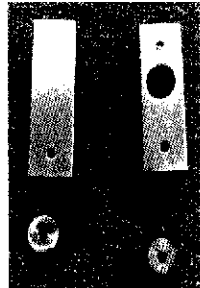

Leg A Leg B

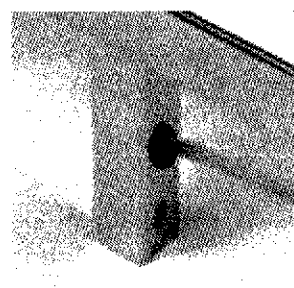

Power cord exposed



Plug in

ELECTRICAL INSTALLTION

This appliance **MUST** be installed in accordance with the relevant wiring rules and regulations and in particular those regulations which cover installation of appliances and accessories in damp situations such as bathrooms ,shower,laundries and other areas with fixed water containers .It is to be fitted in accordance with applicable . Australian /New Zealand Standard (AS/NZS).

The means for disconnection must be incorporated in the fixed wiring in accordance with the wiring rules .Special purpose tools are required for the replacement of the power supply cord and element .Contact an Authorized Service Agent for service.

CARE AND CLEANING

Surface rust can occur on stainless steel over time .To avoid this heated towel rail is best wiped down from time to time with a damp cloth and a stainless steel cleaner .

DO NOT USE ANY ABRASIVE OR CORROSIVE CLEANERS



Builders Express™

SHOWROOM ADDRESS

2/36 Stoddart Road

Prospect, NSW 2148, Australia

Call : 02 9636 8700

Mail: Info@buildersexpressnsw.com.au

Website: <https://www.buildersexpressnsw.com.au>

